

# EASY LIGHT Power LED

5 Years Warranty

Arredamento Interno - indoor

**Art. CIL T500** ( 230Vac - 3 Watt - Im 260 )





IP44

**Art. CIL Q500** ( 230Vac - 3 Watt - Im 260 )

IP44

Plafoniera LED sospensione / soffitto



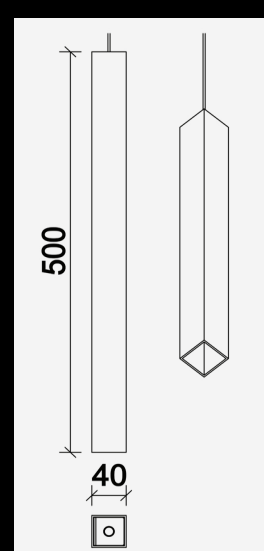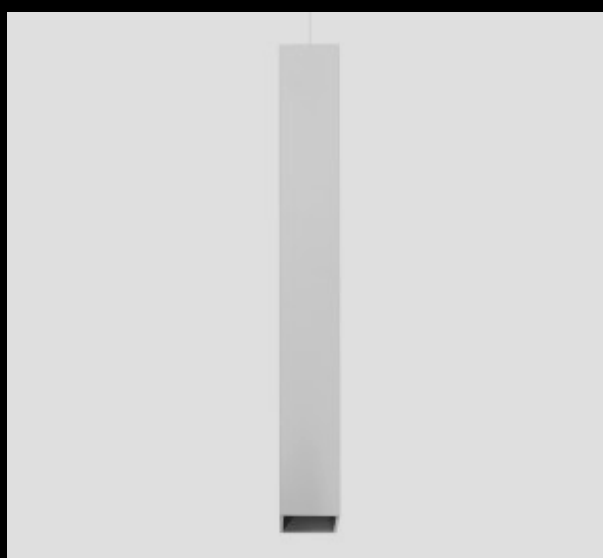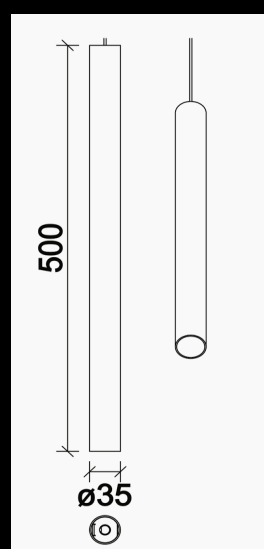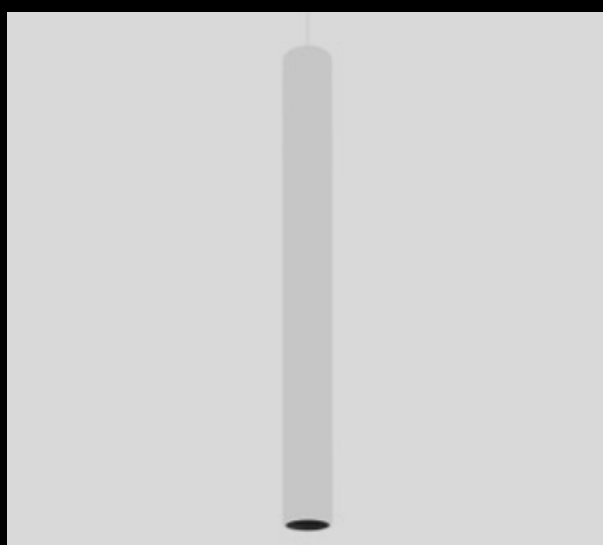




LED Lamp Ceiling LIGHT



# EASY LIGHT Power LED

Plafoniera LED sospensione / soffitto

LED Lamp Ceiling LIGHT

|  |   |   |  |   |             |
|--|---|---|--|---|-------------|
| <b>Code : CIL T500</b><br>LED Module 1 x 3   |   | <b>Power/Watt : 3</b>   | <b>Driver : 230Vac</b>   |   |             |
| <b>Code : CIL Q500</b><br>LED Module 1 x 3   |   | <b>Power/Watt : 3</b>   | <b>Driver : 230Vac</b>   |   |             |
| Protection Class : <b>IP44</b>   | <b>EN 60529 Class</b>   |  |  |  | <b>RoHS</b> |
| Struttura frontale in Alluminio Anodizzato grigio / Bianco / Nero<br><i>Structure in Anodized Aluminium Grey / White / Black</i>               |   |   |  |   |             |
| LED CRI>80 con protezione Opalina resistente ai raggi UV<br><i>LED CRI&gt;80 with UV resistant polycarbonate opal protection</i>               |   |   |  |   |             |
| Lampada LED con Struttura dissipante in Alluminio anodizzato<br><i>LED Wall Lamp with Anodized aluminium dissipating structure</i>             |   |   |  |   |             |
| Code/Art. <b>CIL T500</b>  | Dimensioni <i>Dimensions</i> 35 x h500mm  | OPTIONAL : DIMENSIONI CUSTOM<br>OPTIONAL : CUSTOM DIMENSIONS                      |  |   |             |
| Code/Art. <b>CIL Q500</b>  | Dimensioni <i>Dimensions</i> 40 x 40 x h500mm   | OPTIONAL : DIMENSIONI CUSTOM<br>OPTIONAL : CUSTOM DIMENSIONS                      |  |   |             |
| Alimentazione 230Vac ON/OFF tramite Alimentatore incluso<br><i>Power Supply 230Vac ON/OFF Remote LED Driver included</i>                       |   |   |  |   |             |
| Optional : Alimentatore Dimmer :DALI - 1-10V - PO Pulsante ESTERNO<br><i>Optional : Dimmable LED Driver :DALI - 1-10V - Open Push OUT CASE</i> |   |   |  |   |             |
| KIT per fissaggio a sospensione con cavi acciaio regolabili con frizione incluso<br><i>Suspension Kit steel cable included</i>                 |   |   |  |   |             |
| <i>Optional : KIT in alluminio per fissaggio a soffitto / plafone</i><br><i>Optional : KIT in aluminium for ceiling fix</i>                    |   |   |  |   |             |
| <b>CIL T500 -10</b>  |  Natural White K4000 | <b>Lumen:</b>   | <b>260</b>   |   |             |
| <b>CIL T500 -10</b>  |  Warm White K3000    | <b>Lumen:</b>   | <b>250</b>   |   |             |
| <b>CIL Q500 -10</b>  |  Natural White K4000 | <b>Lumen:</b>   | <b>260</b>   |   |             |
| <b>CIL Q500 -10</b>  |  Warm White K3000    | <b>Lumen:</b>   | <b>250</b>   |   |             |

5 Years Warranty - Long Life Power Led

[www.ett-led.com](http://www.ett-led.com)

pag.113