

# EASY LIGHT Power LED

5 Years Warranty


Arredamento Interno - indoor

Code/Art. **VT S 18 230Vac** ( 18W - lm 1270 ) IP44



Code/Art. **VT S 25,3 230Vac** ( 25,3W - lm 1845 ) IP44

**PROIETTORE LED** LED a soffitto  
**LED PROJECTOR** LED Downlight

**Dimensioni**  
**Dimensions** 195 x h165 mm

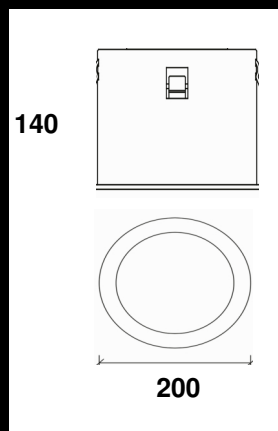




**Beam**



# EASY LIGHT Power LED

**PROIETTORE LED** Tondo LED Orientabile incasso a soffitto

**LED PROJECTOR** Round Adjustable LED downlight

Code/Art. <b>VTSS 18 W</b> LED Module 12 x 1,4	Power Watt : 18	NO Driver : 230Vac
Code/Art. <b>VT S 25,3 W</b> LED Module 18 x 1,4	Power Watt : 25,3	NO Driver : 230Vac
Protection Class : <b>IP44</b>	<b>EN 60529 Class</b>	   <b>RoHS</b>
Ghiera in Alluminio pressofuso : Bianco / Nero / Grigio <i>Aluminium Ring structure : White / Black / Grey</i>		
LED con Struttura dissipante in Alluminio anodizzato <i>LED with Anodized aluminium dissipating structure</i>		
Code/Art.                    Dimensioni 200 xh140mm <b>VT S 18 / VT S 25</b> <i>Dimensions 200 xh140mm</i>		
LED CRI>80 con protezione trasparente resistente ai raggi UV      Lente : 40°/25° <i>LED CRI&gt;80 with UV resistant polycarbonate transparent protection Beam : 40°/25°</i>		
Alimentazione 230Vac ON/OFF Direttamente 230Vac NO Driver - NON dimmerabile <i>Power Supply 230Vac ON/OFF Only ( NO Driver ) No Dimmable</i>		
Possibilità di collegamento elettrico tra più articoli <i>Possibility of electrical connection between more items</i>		
<b>Code / Art.</b>	<b>Kelvin grades / Color Temperature LED</b>	<b>Lumen lm</b>
VT S 18 -11 40°	■ Natural White 4000K	1270
VT S 18 -12 40°	■ Warm White 3000K	1230
VT S 25,3-11 40°	■ Natural White 4000K	1845
VT S 25,3-12 40°	■ Warm White 3000K	1800

5 Years Warranty - Long Life Power Led

pag.117

[www.ett-led.com](http://www.ett-led.com)