


# EASY LIGHT Power LED

5 Years Warranty

Arredamento Interno - indoor

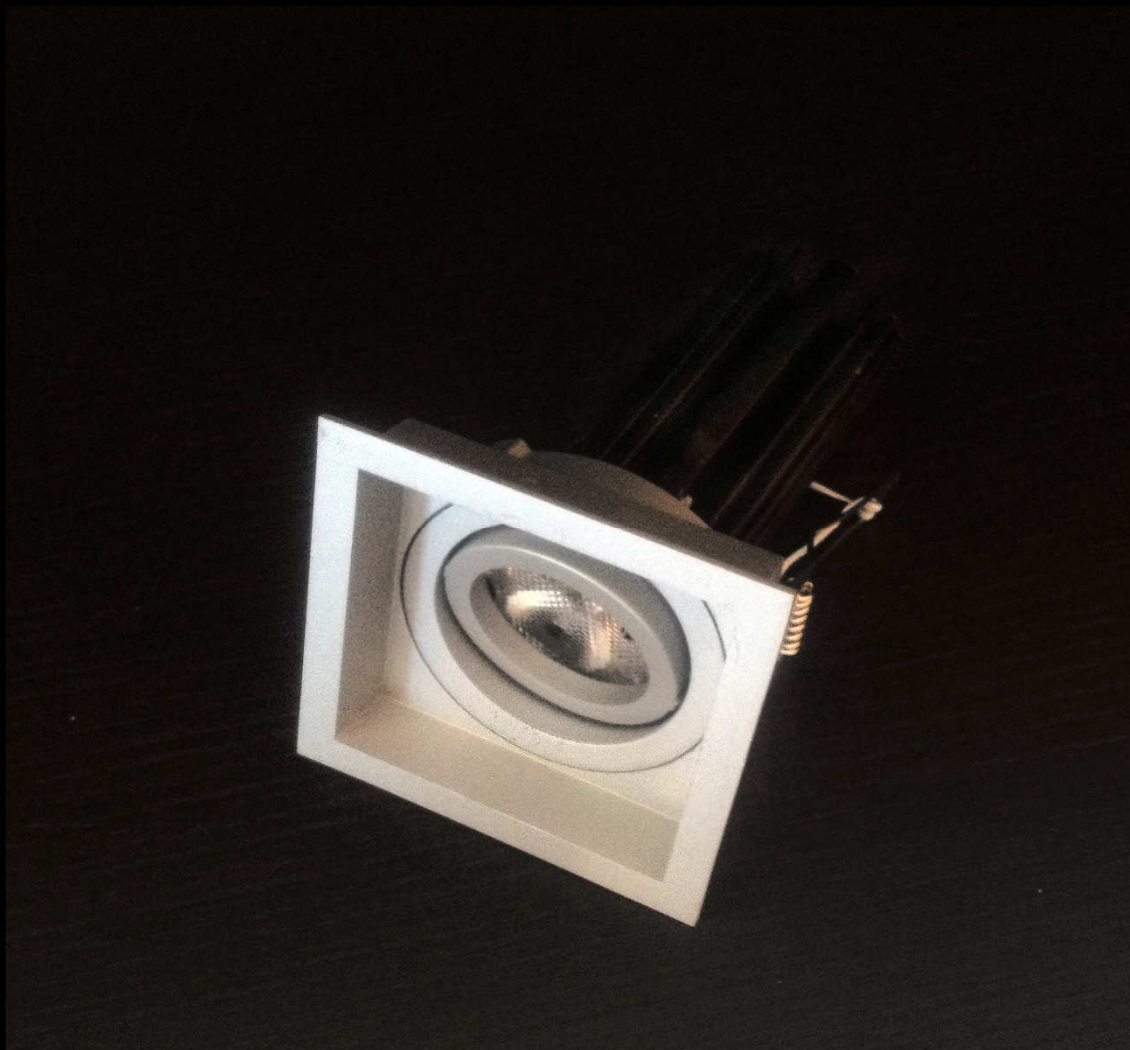

Code GQR3 - GQR9

[www.ett-led.com](http://www.ett-led.com)

# EASY LIGHT Power LED

5 Years Warranty

Arredamento Interno - indoor


Code **GQR3** (IP 40 - 3 Watt - lm 270)

Code **GQR9** (IP 40 - 9 Watt - lm 670)


Spot Quadro Multigiuro Orientabile - da incasso a soffitto





Beam



Beam




Beam



cut out : 80x80mm

90mm



size : 90mm

# EASY LIGHT Power LED

Code <b>G Q R 3</b> LED Module 3 x 1	Power Watt : 3	Driver : 350mA
Code <b>G Q R 9</b> LED Module 3 x 3	Power Watt : 9	Driver : 700mA
Protection class <b>IP IP40</b>	Class	III F CE
Diffusore in policarbonato trasparente		
Lente <b>DxH</b> Beam : <b>40°</b> <i>Optional</i> : 10° - 25°		
Faro Orientabile : Rotazione 360° Inclinazione 20°		
Struttura in Alluminio		
Colori disponibili : Bianco - Nero - Grigio - Acciaio spazzolato		
Dimensioni <b>G Q R 3</b> : 90 x 90 x H 75mm		
Dimensioni <b>G Q R 9</b> : 90 x 90 x H 125mm		
Foro da praticare per l'incasso : diametro 80mm		
Norma CEI 70-1 - EN 60529		
Collegamento elettrico tra più articoli esclusivamente in serie		
Driver / Alimentatore 230V 350 / 700mA <b>ESCLUSO</b>		
<b>Code</b>	<b>Kelvin grades / Color Temperature LED</b>	<b>Lumen lm</b>
<b>G Q R 3-10 40°</b>	■ Cold White K5000	290
<b>G Q R 3-11 40°</b>	■ Natural White K4000	270
<b>G Q R 3-12 40°</b>	■ Warm White K3000	260
<b>G Q R 3-RGB40°</b>	■ ■ ■ <b>R G B</b>	
<b>G Q R 9-10 40°</b>	■ Cold White K5000	690
<b>G Q R 9-11 40°</b>	■ Natural White K4000	670
<b>G Q R 9-12 40°</b>	■ Warm White K3000	660

Centralina RGB / DMX e Telecomando **ESCLUSI**

5 Years Warranty - Long Life Power Led

[www.ett-led.com](http://www.ett-led.com)