

EASY LIGHT Power LED


5 Years Warranty

Arredamento Interno - indoor




Code/Art.	Q 6	500mA	(6W - lm 460)	IP44
Code/Art.	Q 7	230Vac	(7W - lm 600)	IP44
Code/Art.	Q 9,9	230Vac	(9,9W - lm 860)	IP44

SPOT LED Quadro LED Orientabile a soffitto
SPOT LED Square Adjustable LED Downlight

Dimensioni
Dimensions 70 x 70 x h100 mm

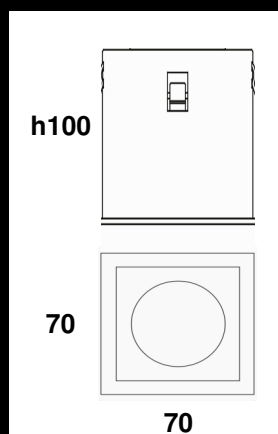

Beam






EASY LIGHT Power LED

SPOT LED Quadro LED Orientabile a soffitto

SPOT LED Square Adjustable LED downlight

Code/Art. Q 6 W LED Module 3 x 2	Power Watt : 6	Driver : 500 mA
Code/Art. Q 7 W LED Module 1 x 7	Power Watt : 7	NO Driver : 230Vac
Code/Art. Q 9,9 W LED Module 9 x 1,1	Power Watt : 9,9	NO Driver : 230Vac

Protection Class : IP44	EN 60529 Class				RoHS
--------------------------------	-----------------------	---	--	---	-------------

Struttura in Alluminio pressofuso : Bianco / Nero / Grigio

Aluminium structure : White / Black / Grey

LED con Struttura dissipante in Alluminio anodizzato

LED with Anodized aluminium dissipating structure

Code/Art. Dimensioni 70 x 70 x h100mm

Q 6 *Dimensions 70 x 70 x h100mm*

LED CRI>80 con protezione trasparente resistente ai raggi UV Lente : 40°/25°/10°

LED CRI>80 with UV resistant polycarbonate transparent protection Beam : 40°/25°/10°

Alimentazione 230Vac ON/OFF tramite Alimentatore incluso

Power Supply 230Vac ON/OFF LED Driver included

Optional : Alimentatore Dimmer :DALI - 1-10V - PO Pulsante **esterno**

Optional : Out lamp Dimmable LED Driver :DALI - 1-10V - Open Push

Code/Art. Dimensioni 70 x 70 x h100mm

Q 7 - Q 9,9 *Dimensions 70 x 70 x h100mm*

LED CRI>80 con protezione trasparente resistente ai raggi UV Lente : 40°/25°

LED CRI>80 with UV resistant polycarbonate transparent protection Beam : 40°/25°

Alimentazione 230Vac ON/OFF Direttamente 230Vac NO Driver - NON dimmerabile

Power Supply 230Vac ON/OFF Only (NO Driver) No Dimmable

Possibilità di collegamento elettrico tra più articoli

Possibility of electrical connection between more items

Code / Art.	Kelvin grades / Color Temperature LED	Lumen lm
Q 6 W - 10 40°	■ Cold White 5000K	490
Q 6 W - 11 40°	■ Natural White 4000K	460
Q 6 W - 12 40°	■ Warm White 3000K	430
Q 6 W -12e 40°	■ Extra Warm White 2700K	420
Q 6 - RGB 40°	■ ■ ■ R G B	
Q 7 W - 11 40°	■ Natural White 4000K	600
Q 7 W - 12 40°	■ Warm White 3000K	585
VQ9,9 W - 11 40°	■ Natural White 4000K	860
VQ9,9 W - 12 40°	■ Warm White 3000K	830

5 Years Warranty - Long Life Power Led

pag.109

www.ett-led.com