



**Barra LED** versione  
**LED Bar** version

# PRO LC

**5 Years Warranty**  
*made in Italy*

**LED High CRI Efficiency Light**

Alimentazione **12 / 24 Vdc** Classe **F III**  
*Power Supply* *Class*

Classe di protezione **IP40** - Optional **IP67**  
*Class protection*



Optional





Profilo in alluminio anodizzato  
*Anodized aluminium profile*

**Art. CSL 00046**

Lunghezza standard **1000 mm**  
*Standard length* *39.37 inches*

Lunghezza custom **da 120 a 3050mm**  
*Custom length* *from 4.7 to 120 inches*

**1000 mm**  
*39.37 inches*  
**da 120 a 3050mm**  
*from 4.7 to 120 inches*

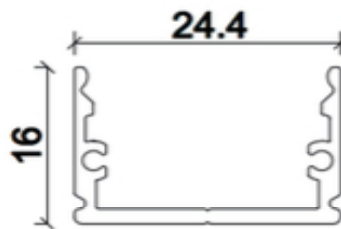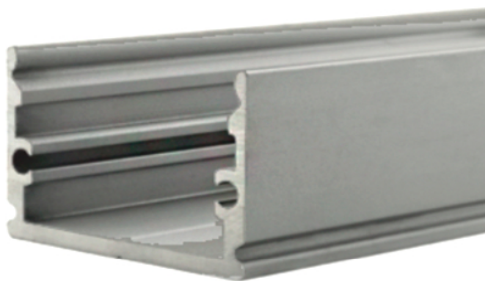

Clips di fissaggio  
*Steel fixing*

Colore profilo disponibile  
*Available profile color*

**AA** : Anodizzato/Anodized aluminium  
**AB** : Anodizzato nero / Black anodized  
**AW** : Verniciato bianco/ White painted

Diffusore in policarbonato resistente ai raggi UV  
*UV resistant polycarbonate diffuser*



**T** : Trasparente/Transparent

**O** : Opalino/Opal



**OQ** : Opalino quadro/Opal square

**OR** : Opalino rotondo/Opal round

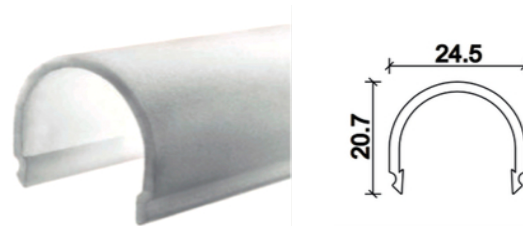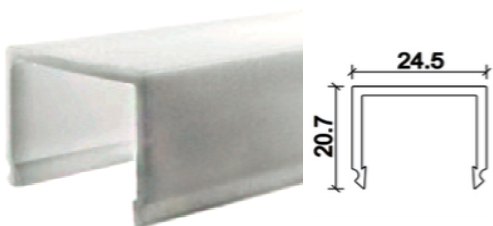

Codice Articolo Code	Color / Diffuser Alu / Type	Temperatura di colore LED Color LED Temperature	Power Vdc W/m	Q.ty LED/m	Efficiency Lumen/m
PRO LC 7-10	/ AA / O	❑ Cold White 5000K	12/24 7	60	440
PRO LC 7-11	/ AA / O	❑ Natural White 4000K	12/24 7	60	410
PRO LC 7-12	/ AA / O	❑ Warm White 3000K	12/24 7	60	390
PRO LC 7-12e	/ AA / O	❑ Extra Warm 2700K	12/24 7	60	380
PRO LC 7-RGB	/ AA / O	❑ ❖ ❖ RGB	12/24 7	60	320
PRO LC 18-10	/ AA / O	❑ Cold White 5000K	12/24 18	60	1070
PRO LC 18-11	/ AA / O	❑ Natural White 4000K	12/24 18	60	1000
PRO LC 18-12	/ AA / O	❑ Warm White 3000K	12/24 18	60	980
PRO LC 18-12e	/ AA / O	❑ Extra Warm 2700K	12/24 18	60	960
PRO LC 18-RGB	/ AA / O	❑ ❖ ❖ RGB	12/24 18	60	890
PROLC18 Dual white	/ AA / O	❑ ❑ Cold/Warm 6/3000K	24 18	120	1200
PRO LC 23-10	/ AA / O	❑ Cold White 5000K	12/24 23	75	2020
PRO LC 23-11	/ AA / O	❑ Natural White 4000K	12/24 23	75	1930
PRO LC 23-12	/ AA / O	❑ Warm White 3000K	12/24 23	75	1890
PRO LC 10-10	/ AA / O	❑ Cold White 5000K	12/24 10	120	870
PRO LC 10-11	/ AA / O	❑ Natural White 4000K	12/24 10	120	810
PRO LC 10-12	/ AA / O	❑ Warm White 3000K	12/24 10	120	790
PRO LC 10-12e	/ AA / O	❑ Extra Warm 2700K	12/24 10	120	690
PRO LC 14-10	/ AA / O	❑ Cold White 5000K	24 14	180	1360
PRO LC 14-11	/ AA / O	❑ Natural White 4000K	24 14	180	1310
PRO LC 14-12	/ AA / O	❑ Warm White 3000K	24 14	180	1260
PRO LC 20-10	/ AA / O	❑ Cold White 5000K	24 20	240	1560
PRO LC 20-11	/ AA / O	❑ Natural White 4000K	24 20	240	1490
PRO LC 20-12	/ AA / O	❑ Warm White 3000K	24 20	240	1460
PRO LC 20-12e	/ AA / O	❑ Extra Warm 2700K	24 20	240	1410

Alimentatore LED, Centralina RGB / DMX e Telecomando sono ESCLUSI  
LED Driver, RGB / DMX module and Remote control are excluded

**Long Life Power LED**