

EASY LIGHT Power LED

5 Years Warranty


Arredamento Interno - indoor

Code/Art.	MTS 2	500mA	(2W - lm 160)	IP44
Code/Art.	MQS 2	500mA	(2W - lm 160)	IP44
Code/Art.	MRS 2	500mA	(2W - lm 160)	IP44


LED SEGNAPASSO incasso a parete
WALL RECESSED FITTINGS LED




MTS 2

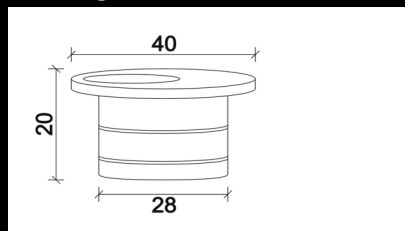

MQS 2

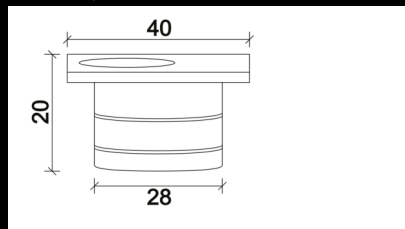

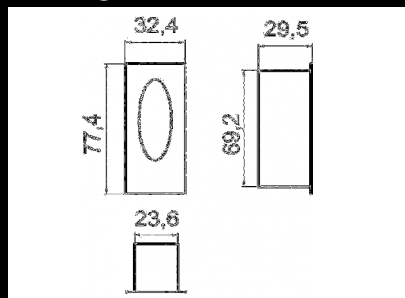


MRS 2



EASY LIGHT Power LED

LED SEGNAPASSO incasso a parete
WALL RECESSED FITTINGS LED

Code/Art. MTS 2 LED Module 1 x 2	Power Watt : 2	Driver : 500 mA
Code/Art. MQS 2 LED Module 1 x 2	Power Watt : 2	Driver : 500 mA
Code/Art. MRS 2 LED Module 1 x 2	Power Watt : 2	NO Driver : 500 mA

Protection Class : IP44	EN 60529 Class				RoHS
--------------------------------	-----------------------	---	--	---	-------------

Ghiera in Alluminio pressofuso : Bianco / Grigio / Cromo

Aluminium Ring structure : White / Grey / Cromo

LED con Struttura dissipante in Alluminio anodizzato

LED with Anodized aluminium dissipating structure

Code/Art. Dimensioni 40 x h20mm Foro da praticare : 40mm

MTS 2 *Dimensions 40 x h20mm* *Installation hole : 40mm*

Code/Art. Dimensioni 40 x 40 x h20mm Foro da praticare : 40mm

MQS 2 *Dimensions 40 x 40 x h20mm* *Installation hole : 40mm*

Code/Art. Dimensioni 78 x 32 x h25mm Foro da praticare :25 x 70mm

MRS 2 *Dimensions 78 x 32 x h25mm* *Installation hole :25 x 70mm*

Optional : Cassaforma da muro

Optional : Wall Formwork

Alimentazione 230Vac ON/OFF tramite Alimentatore remoto

Power Supply 230Vac ON/OFF Remote LED Driver

Optional : Alimentatore Dimmer :DALI - 1-10V - PO Pulsante

Optional : Dimmable LED Driver :DALI - 1-10V - Open Push

Possibilità di collegamento elettrico tra più articoli

Possibility of electrical connection between more items

Code / Art.	Kelvin grades / Color Temperature LED	Lumen lm
MTS 2 - 10 40°	■ Cold White 5000K	170
MTS 2 - 11 40°	■ Natural White 4000K	160
MTS 2 - 12 40°	■ Warm White 3000K	150
MTS 2 - 12e 40°	■ Extra Warm White 2700K	130
MQS 2 - 10 40°	■ Cold White 5000K	170
MQS 2 - 11 40°	■ Natural White 4000K	160
MQS 2 - 12 40°	■ Warm White 3000K	150
MQS 2 - 12e 40°	■ Extra Warm White 2700K	130
MRS 2 - 10 40°	■ Cold White 5000K	170
MRS 2 - 11 40°	■ Natural White 4000K	160
MRS 2 - 12 40°	■ Warm White 3000K	150
MRS 2 - 12e 40°	■ Extra Warm White 2700K	130

5 Years Warranty - Long Life Power Led

pag.263