



E.T.T.
LED

Strip LED N
LED Strip N

www.ett-led.com



LED STRIP with High CRI Efficiency Light CRI >94 High R 9

Strip LED 3014
3014 LED Strip

Lunghezza standard : 5000 mm
Standard length : 200 inches

Art. STR 3014 240 I

Fratturabile ogni : 25mm
Cut Strip every : 25mm

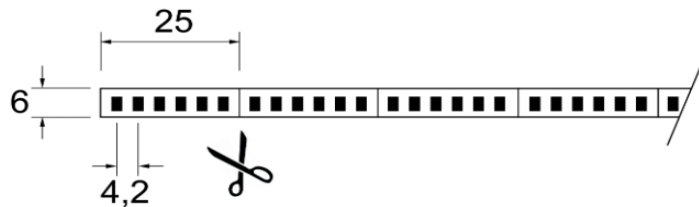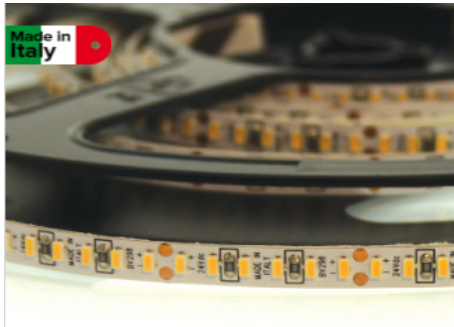

Alimentazione 24 Vdc
Power Supply

Classe
Class



RoHS

Optional



Codice Code	Articolo Article	Classe IP Class Protection	Temperatura di colore LED Color LED Temperature	Power Vdc W/m	Q.ty LED/m	Efficiency Lumen/m
STR 3014 240I-10		IP20	Cold White 5000K	24 20	240	2600
STR 3014 240I-11		IP20	Natural White 4000K	24 20	240	2550
STR 3014 240I-12		IP20	Warm White 3000K	24 20	240	2460
STR 3014 240I-12e		IP20	Extra Warm 2700K	24 20	240	2340
STR 3014 240I-12b		IP20	Extra Warm 2400K	24 20	240	2140
STR 3014 240I-12d		IP20	Extra Warm 2200K	24 20	240	2050


LED STRIP with High CRI Efficiency Light CRI >94 High R 9

Strip LED 3528
3528 LED Strip

Lunghezza standard : 5000 mm
Standard length : 200 inches

Art. STR 2835 240 L

Fratturabile ogni : 25mm
Cut Strip every : 25mm

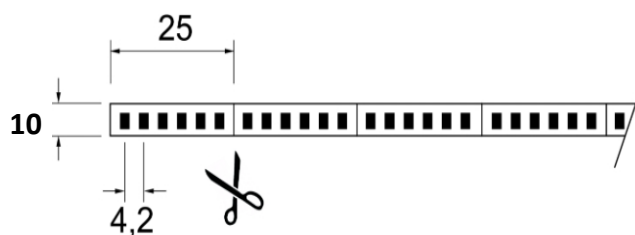

Alimentazione 24 Vdc
Power Supply

Classe
Class



RoHS

Optional






Codice Code	Articolo Article	Classe IP Class Protection	Temperatura di colore LED Color LED Temperature	Power Vdc W/m	Q.ty LED/m	Efficiency Lumen/m
STR 2835 240L-10		IP20	Cold White 5000K	24 20	240	2280
STR 2835 240L-11		IP20	Natural White 4000K	24 20	240	2150
STR 2358 240L-12		IP20	Warm White 3000K	24 20	240	2100
STR 2835 240L-12e		IP20	Extra Warm 2700K	24 20	240	1960

LED STRIP with High CRI Efficiency Light **CRI >94** **High R 9**

Strip LED 2835 Lunghezza standard : 5000 mm
2835 LED Strip Standard length : 200 inches

Art. STR 2835 14 120 L Fratturabile ogni : 50mm
Cut Strip every : 50mm

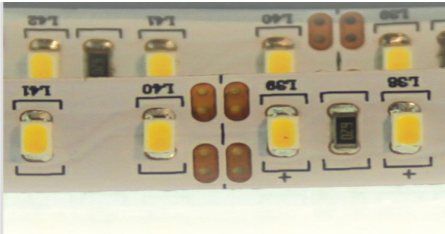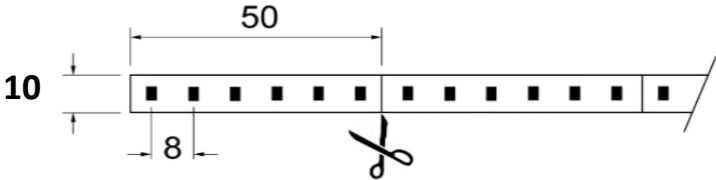Alimentazione **24 Vdc** Classe **F III** **CE** **RoHS** Optional 



Power Supply Class


Codice Articolo Code	Classe IP Class Protection	Temperatura di colore LED Color LED Temperature	Power Vdc W/m	Q.ty LED/m	Efficiency Lumen/m
STR283514 120L-10	IP20	■ Cold White 5000K	24 14	120	1580
STR283514 120L-11	IP20	■ Natural White 4000K	24 14	120	1510
STR283514 120L-12	IP20	■ Warm White 3000K	24 14	120	1490
STR283514 120L-12e	IP20	■ Extra Warm 2700K	24 14	120	1440

LED STRIP with High CRI Efficiency Light **CRI >94** **High R 9**

Strip LED 3528 Lunghezza standard : 5000 mm
3528 LED Strip Standard length : 200 inches

Art. STR 3528 10 120 L Fratturabile ogni : 50mm
Cut Strip every : 50mm

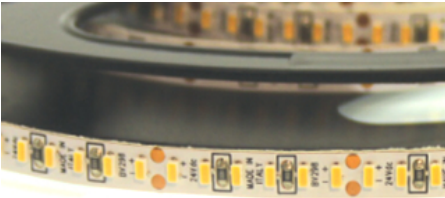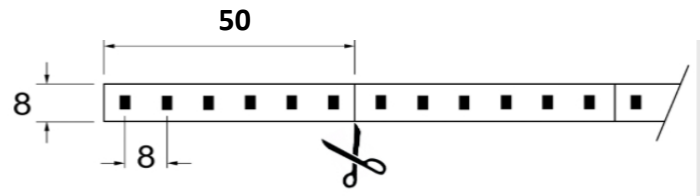Alimentazione **12 Vdc** Classe **F III** **CE** **RoHS** Optional 

Power Supply Class



Codice Articolo Code	Classe IP Class Protection	Temperatura di colore LED Color LED Temperature	Power Vdc W/m	Q.ty LED/m	Efficiency Lumen/m
STR283510 120L-10	IP20	■ Cold White 5000K	24 10	120	1080
STR283510 120L-11	IP20	■ Natural White 4000K	24 10	120	1010
STR283510 120L-12	IP20	■ Warm White 3000K	24 10	120	980
STR283510 120L-12e	IP20	■ Extra Warm 2700K	24 10	120	940

LED STRIP with High CRI Efficiency Light CRI >94 High R 9

Strip LED 2216
2216 LED Strip

Lunghezza standard : 5000 mm
Standard length : 200 inches
Fratturabile ogni : 29,4mm
Cut Strip every : 29,4mm

Art. STR 2216 204 L

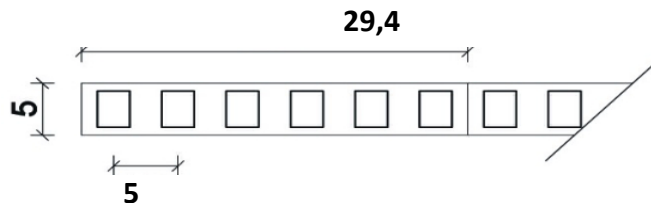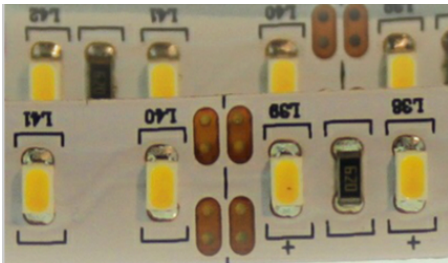

Alimentazione 24 Vdc
Power Supply

Classe
Class

F III CE

RoHS Optional





Codice Articolo Code	Classe IP Class Protection	Temperatura di colore LED Color LED Temperature	Power Vdc W/m	Q.ty LED/m	Efficiency Lumen/m
STR 2216 204L-10	IP20	■ Cold White 5000K	24 14	204	1420
STR 2216 204L-11	IP20	■ Natural White 4000K	24 14	204	1400
STR 2216 204L-12	IP20	■ Warm White 3000K	24 14	204	1360
STR 2216 204L-12e	IP20	■ Extra Warm 2700K	24 14	204	1290

LED STRIP with High CRI Efficiency Light CRI >90 High R 9

Strip LED 3014
3014 LED Strip

Lunghezza standard : 5000 mm
Standard length : 200 inches
Fratturabile ogni : 33,3mm
Cut Strip every : 33,3mm

Art. STR 3528 180 L

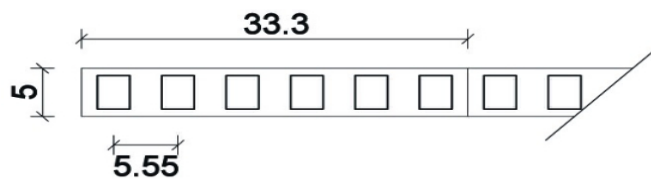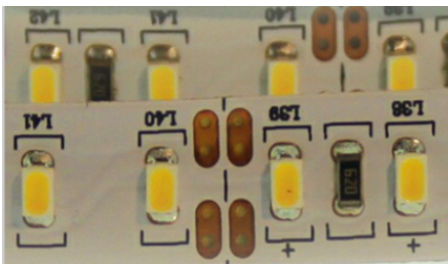

Alimentazione 24 Vdc
Power Supply

Classe
Class

F III CE

RoHS Optional



Codice Articolo Code	Classe IP Class Protection	Temperatura di colore LED Color LED Temperature	Power Vdc W/m	Q.ty LED/m	Efficiency Lumen/m
STR 3528 180L-10	IP20	■ Cold White 5000K	24 14	180	1490
STR 3528 180L-11	IP20	■ Natural White 4000K	24 14	180	1440
STR 3528 180L-12	IP20	■ Warm White 3000K	24 14	180	1360
STR 3528 180L-12e	IP20	■ Extra Warm 2700K	24 14	180	1320


LED STRIP with High CRI Efficiency Light CRI >90 High R 9

Strip LED 2835
2835 LED Strip

Art. STR 240 22L



Lunghezza standard : 5000 mm
Standard length : 200 inches
Fratturabile ogni : 80mm
Cut Strip every : 80mm

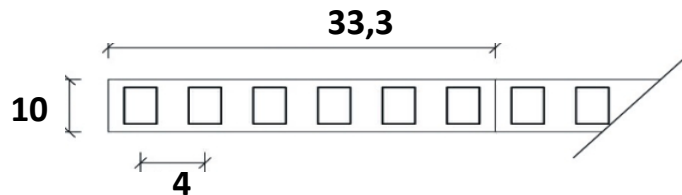


Alimentazione **24 Vdc** Classe **F III CE RoHS** Optional 
Power Supply Class

Codice Articolo Code	Classe IP Class Protection	Temperatura di colore LED Color LED Temperature	Power Vdc W/m	Q.ty LED/m	Efficiency Lumen/m
STR 240 22L-10	IP20	■ Cold White 5000K	24 22	240	2930
STR 240 22L-11	IP20	■ Natural White 4000K	24 22	240	2880
STR 240 22L-12	IP20	■ Warm White 3000K	24 22	240	2790
STR 240 22L-12e	IP20	■ Extra Warm 2700K	24 22	240	2630


LED STRIP with High CRI Efficiency Light CRI >90 High R 9

Strip LED 2835
2835 LED Strip

Art. STR 2835 14 60L

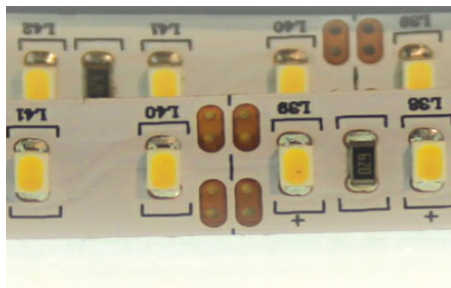

Lunghezza standard : 5000 mm
Standard length : 200 inches
Fratturabile ogni : 100mm
Cut Strip every : 100mm

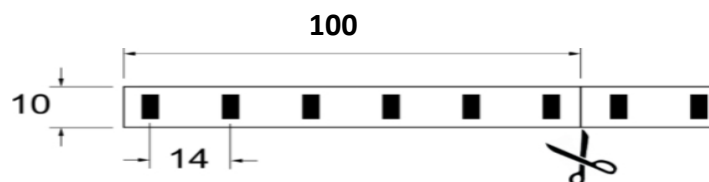

Alimentazione **24 Vdc** Classe **F III CE RoHS**
Power Supply Class

Codice Articolo Code	Classe IP Class Protection	Temperatura di colore LED Color LED Temperature	Power Vdc W/m	Q.ty LED/m	Efficiency Lumen/m
STR 2835 14 60L-10	IP20 - IP 67	■ Cold White 5000K	24 14	60	1600
STR 2835 14 60L-11	IP20 - IP 67	■ Natural White 4000K	24 14	60	1560
STR 2835 14 60L-12	IP20 - IP 67	■ Warm White 3000K	24 14	60	1510



LED STRIP with High CRI Efficiency Light

CRI >90 High R 9

Strip LED 5050
5050 LED Strip

Lunghezza standard : 5000 mm
Standard length : 200 inches
Fratturabile ogni : 100mm
Cut Strip every : 100mm

Art. STR 5050 60

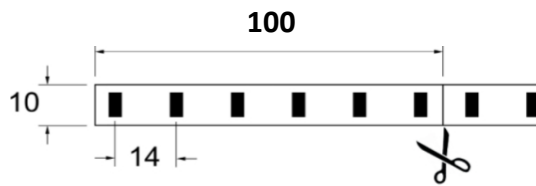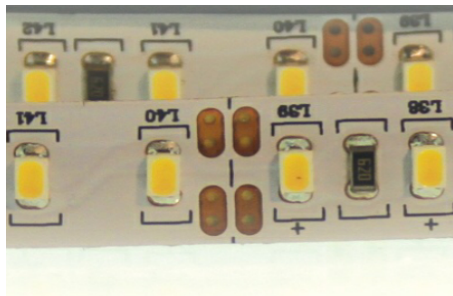

Alimentazione **12/24 Vdc** Classe
Power Supply Class

F III CE RoHS

Codice Articolo Code	Classe IP Class Protection	Temperatura di colore LED Color LED Temperature	Power Vdc W/m	Q.ty LED/m	Efficiency Lumen/m
STR 5050 60-10	IP20 - IP 67	■ Cold White 5000K	12/24 14	60	1000
STR 5050 60-11	IP20 - IP 67	■ Natural White 4000K	12/24 14	60	960
STR 5050 60-12	IP20 - IP 67	■ Warm White 3000K	12/24 14	60	890
STR 5050 60 RGB	IP20 - IP 67	■ ■ ■ RGB	12/24 14	60	



LED STRIP with High CRI Efficiency Light

CRI >94 High R 9

Strip LED 2835
2835 LED Strip

Lunghezza standard : 5000 mm
Standard length : 200 inches
Fratturabile ogni : 100mm
Cut Strip every : 100mm

Art. STR 2835 4,8 60L

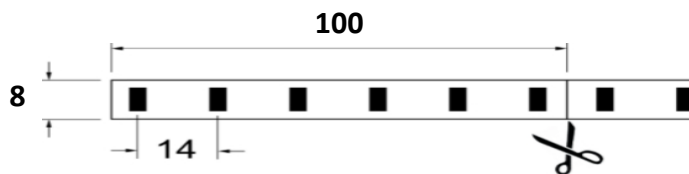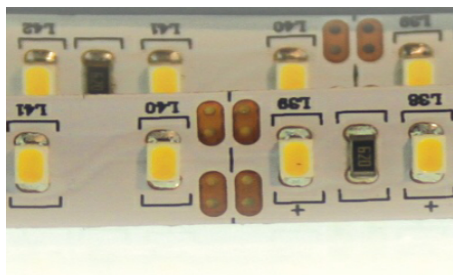

Alimentazione **24 Vdc** Classe
Power Supply Class

F III CE RoHS



Codice Articolo Code	Classe IP Class Protection	Temperatura di colore LED Color LED Temperature	Power Vdc W/m	Q.ty LED/m	Efficiency Lumen/m
STR 2835 4,860L-10	IP20 - IP 67	■ Cold White 5000K	24 4,8	60	540
STR 2835 4,860L-11	IP20 - IP 67	■ Natural White 4000K	24 4,8	60	530
STR 2835 4,860L-12	IP20 - IP 67	■ Warm White 3000K	24 4,8	60	510
STR 2835 4,860L-12e	IP20 - IP 67	■ Extra Warm 2700K	24 4,8	60	480

LED STRIP with High CRI Efficiency Light CRI >94 High R 9

Strip LED 2110
2110 LED Strip

Art. STR 280 20 dynamic

Lunghezza standard : 5000 mm
Standard length : 200 inches
Fratturabile ogni : 100mm
Cut Strip every : 100mm

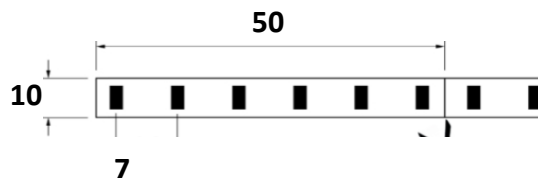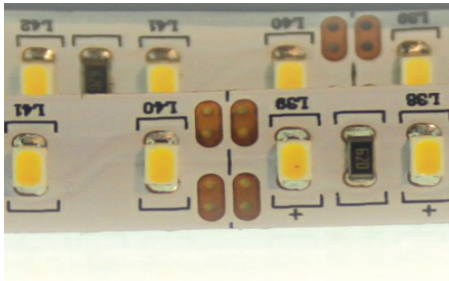

Alimentazione **24 Vdc** Classe
Power Supply Class

F III CE RoHS



Codice Articolo Code	Classe IP Class Protection	Temperatura di colore LED Color LED Temperature	Power Vdc W/m	Q.ty LED/m	Efficiency Lumen/m
STR 2110 280 20dyn	IP20	■ Cold / Warm White	24 20	280	2120

LED STRIP with High CRI Efficiency Light

Strip LED 5050
5050 LED Strip

Art. STR 5050 96 RGBW

Lunghezza standard : 5000 mm
Standard length : 200 inches
Fratturabile ogni : 62,5mm
Cut Strip every : 62,5mm

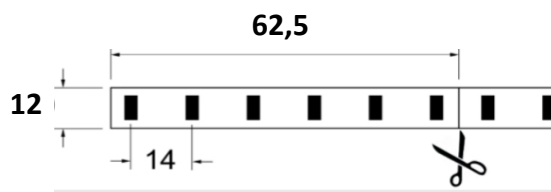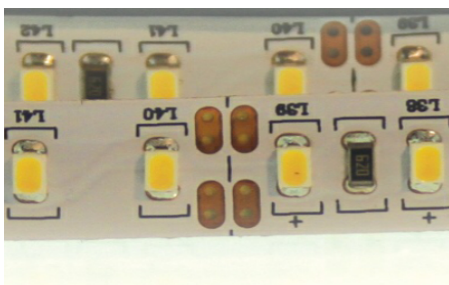

Alimentazione **24 Vdc** Classe
Power Supply Class

F III CE RoHS

Codice Articolo Code	Classe IP Class Protection	Temperatura di colore LED Color LED Temperature	Power Vdc W/m	Q.ty LED/m	Efficiency Lumen/m
STR 5050 96 RGBW	IP20 - IP 67	■ ■ ■ RGB ■ White	24 23	96	

E.T.T. Srl

Sede Legale

Headquarter

Via Milano, 3 21020 Ternate (VA) Italy

Uffici

Office

Via Milano angolo Via Venezia, 22060 Cabiato (CO) Italy

Tel. +39 031 6122171 - +39 031 756748

Fax +39 031 756748

info@ett-led.com

www.ett-led.com